

FC CE

TELECOM SHIELD



FOR MORE INFORMATION PLEASE CONTACT
GLOBALSALES@ALLO.COM

allo.com

The **Telecom Shield** is used to bridge the FXO/FXS ports to IP.

This addition will allow **SPARKY** to become a PBX system (using Asterisk or similar) and you can also design your own analog gateway.

With its 4 analog ports, you can chose from a mix of 2FXO/2FXS or straight 4FXS/4FXO.


Currently, we support Asterisk 13.2 with Dahdi version 2.10.1 (modified for SPI).

We have customized the user interface which is PHP based.

Tech Specs

- 2 x 2 channel FXS or FXO daughter boards with daisy chain mode
- On/Off Hook LED Indication
- J-TAG Interface for Programming
- Field upgradable
- Total Power Consumption: 3.3Watt / 12V/3A DC Input Supply
- Board size: LWH = 95mm * 58mm * 16mm


Top View

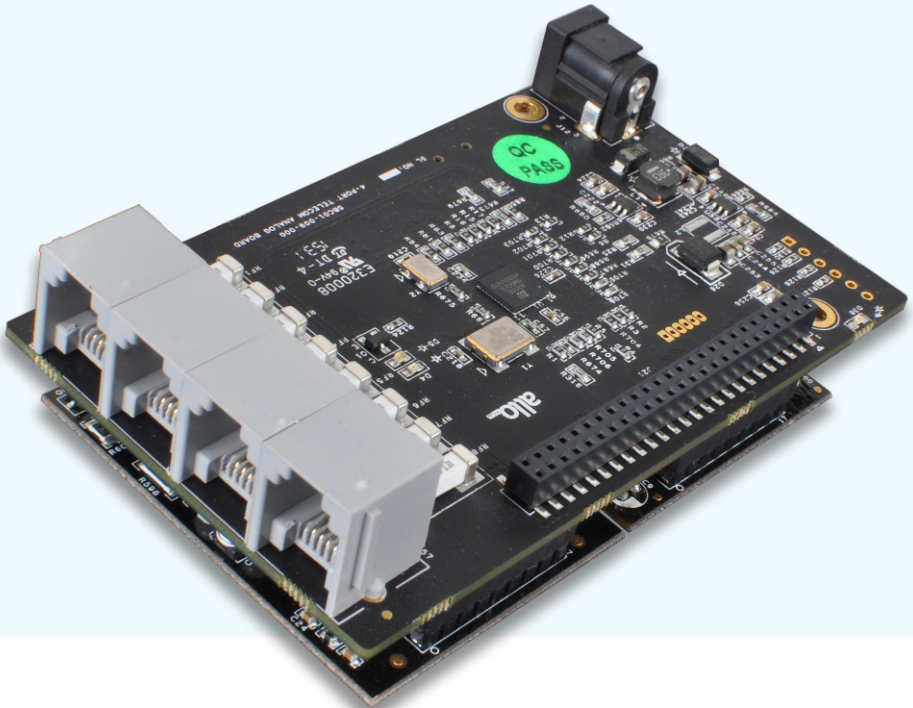

FOR MORE INFORMATION PLEASE CONTACT
GLOBALSALES@ALLO.COM

allo.com

Bottom View

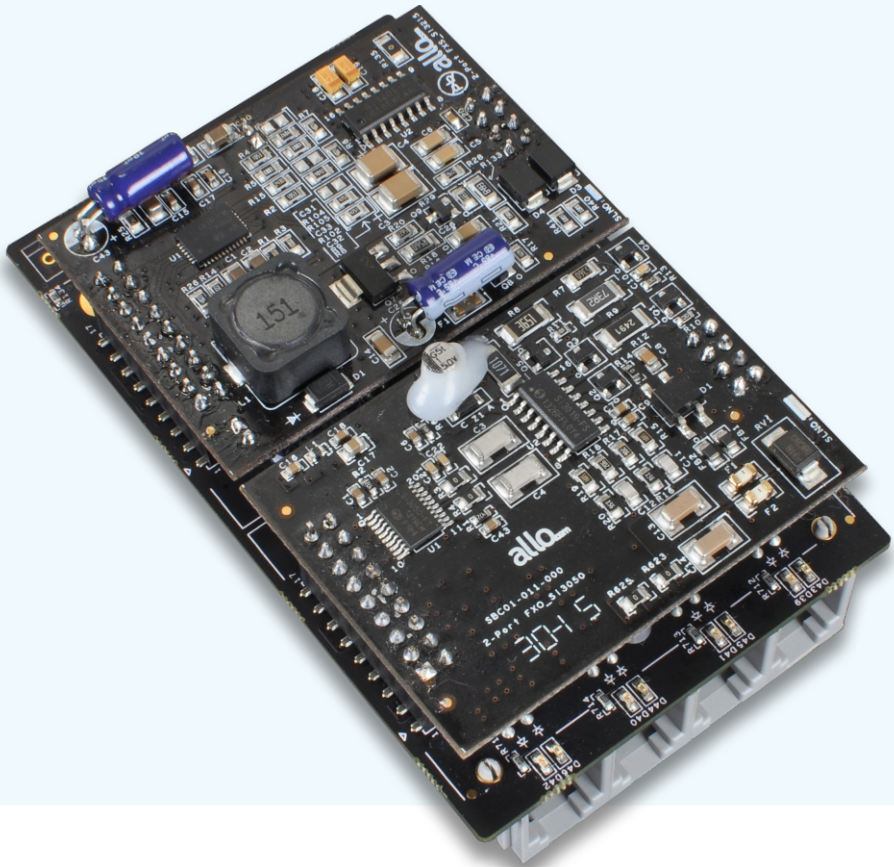

FOR MORE INFORMATION PLEASE CONTACT
GLOBALSALES@ALLO.COM

allo.com